

Lantech[®]

Lan-ringer[®]

Horizontal Wrapping

Performance is Everything!




Custom built for heavy loads that require high wrap force.



Lan-ringer®

Effectively Wraps Load for Millions of Wrap Cycles!

- Over 30 years of application knowledge.
- Service and Engineering working together.
- 5" thick, 1,800 lb., forged steel, precision main bearing.
- Exclusive dual support roll carriage.
- Lenze 5HP Drive System "All-in-One Unit" (motor, brake, reducer)
- Allen Bradley touchscreen Panel View 600 Plus.
- Robust Power-thru® Conveyor System.
- Lan-Logix™ state of the art control system.

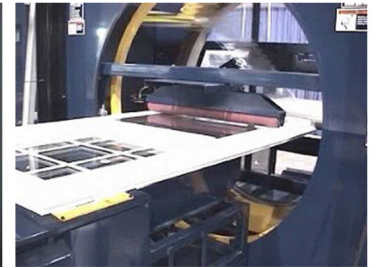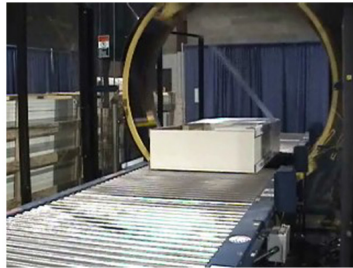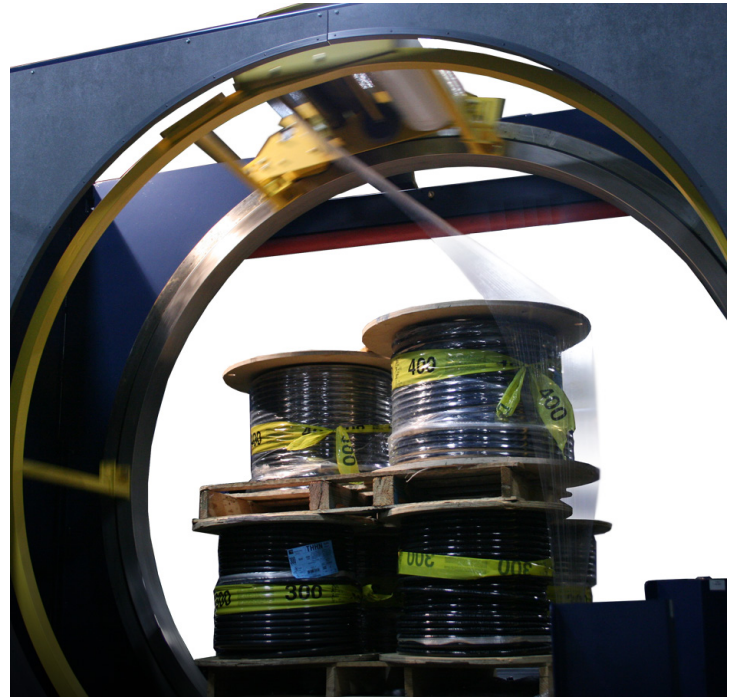

Lan-ringer Specifications

Film Delivery System

Power Roller-Stretch System®	150% Standard, 100-250% Available
Wrapping Force	Adjustable
Film Capacity	10" Roll Diameter, 20"-30" Film Width
Film Break Detection	Standard

Electrical Requirements

Machine Voltage	460V, 30 Amp
-----------------	--------------

Air Requirements

Clean, Dry Air	3-5 CFM, 80 PSI
----------------	-----------------

Service Support

24 hrs/7 days a week

	RPM	Max Load Size Diagonal
--	-----	------------------------

LR-4000	50	32"
----------------	----	-----

LR-6000	40	52"
----------------	----	-----

LR-7500	30	67"
----------------	----	-----

LR-9000	25	82"
----------------	----	-----

Min Load Length (with power-thru conveyor)

24" (20" Film)	36" (30" Film)
----------------	----------------

Min Load Length (without power-thru conveyor)

60" (20" Film)	72" (30" Film)
----------------	----------------

Specifications subject to change without notice. Lantech systems and sub-systems are protected by U.S. and foreign patents.